



ENERMAX LED LIGHTING Technology provides consistent and uniform luminance

## T.B.RGB (UCTBRGB12-TUF)




Incredibly bright and even lighting with no visible spots



Uneven lighting with visible spots

Others

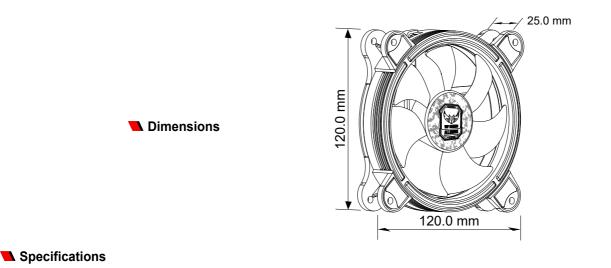

## UCTBRGB12-TUF **Model Number** Speed (RPM) 1000 (±10%) Air Flow (CFM) 31.59 (max) Air Flow (m<sup>3</sup>/h) 53.67 (max) Static Pressure (mm-H<sub>2</sub>O) 0.84 (max) Maximum Noise (dBA) 19 Rated Current - Fan (A) 0.15 Rated Current - RGB LED (A) 0.3 Rated Voltage (V) 12 MTBF(hours) ≥160,000 @ 25°C Connector 3-PIN (Power cable) / 4-PIN (RGB cable) Screw x 4 Accessory

## **Shipping Information**

Model Number		UCTBRGB12-TUF
Bar code	EAN	4713157724472
	UPC	
Box dimensions		125 (D) x 130 (W) x 30 (H) mm
Gross Weight / unit		0.2 kg
Carton dimensions		430 (D) x 360 (W) x 247 (H) mm
Q'ty / carton		-
Gross Weight / carton		-



© 2018 ENERMAX TECHNOLOGY CORPORATION. All rights reserved. Specifications are subject to change without notice. Content of delivery might differ in different areas or from illustrations. Some trademarks may be claimed as the property of others.